

ELMARK[®]

The Brand of Electricity

LED PANELS SQUARE STELLAR



GENERAL INFORMATION »

- ∴ Rated voltage: 230V/50-60Hz
- ∴ Power: 12W; 18W; 24W
- ∴ Power supply: Control gear; DC device- driver
- ∴ Colour temperature: 2700K; 4000K; 6500K
- ∴ LED source: SMD2835
- ∴ Colour: White
- ∴ Body: Aluminium
- ∴ Beam angle: 120°
- ∴ Colour rendering index: Ra≥80
- ∴ Switch on/off: >10000
- ∴ Average lifetime: 15000h
- ∴ Starting time: <0,5s
- ∴ Power factor: $\lambda > 0,55$
- ∴ Installation: Built-in
- ∴ Protection against dust and moisture: IP40
- ∴ Available in variant with an emergency kit

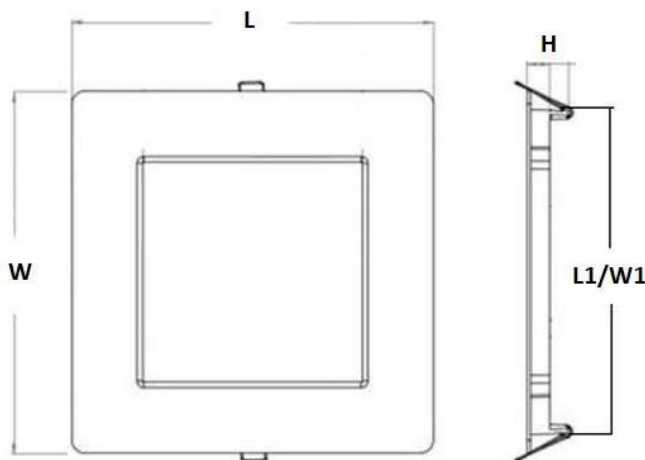
FEATURES »

- ∴ Completely replace traditional fluorescent lighting
- ∴ Safety, low voltage operation
- ∴ Emit a very pleasant and even light with very low glare factor due to the diffusion lens
- ∴ Low power consumption
- ∴ Instant light with maximum luminous flux
- ∴ Environmentally friendly - do not emit mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration
- ∴ Suitable for home, offices, halls, shops, hospitals

PRODUCT DETAILS »

Catalogue number	Catalogue number with Emergency kit	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body
99XLED633	99XLED633E	12	840	2700	white
99XLED632	99XLED632E	12	840	4000	white
99XLED632CW	99XLED632CWE	12	840	6500	white
99XLED635	99XLED635E	18	1350	2700	white
99XLED634	99XLED634E	18	1350	4000	white
99XLED634CW	99XLED634CWE	18	1350	6500	white
99XLED637	99XLED637E	24	1800	2700	white
99XLED636	99XLED636E	24	1800	4000	white
99XLED636CW	99XLED636CWE	24	1800	6500	white

DIMENSIONS »



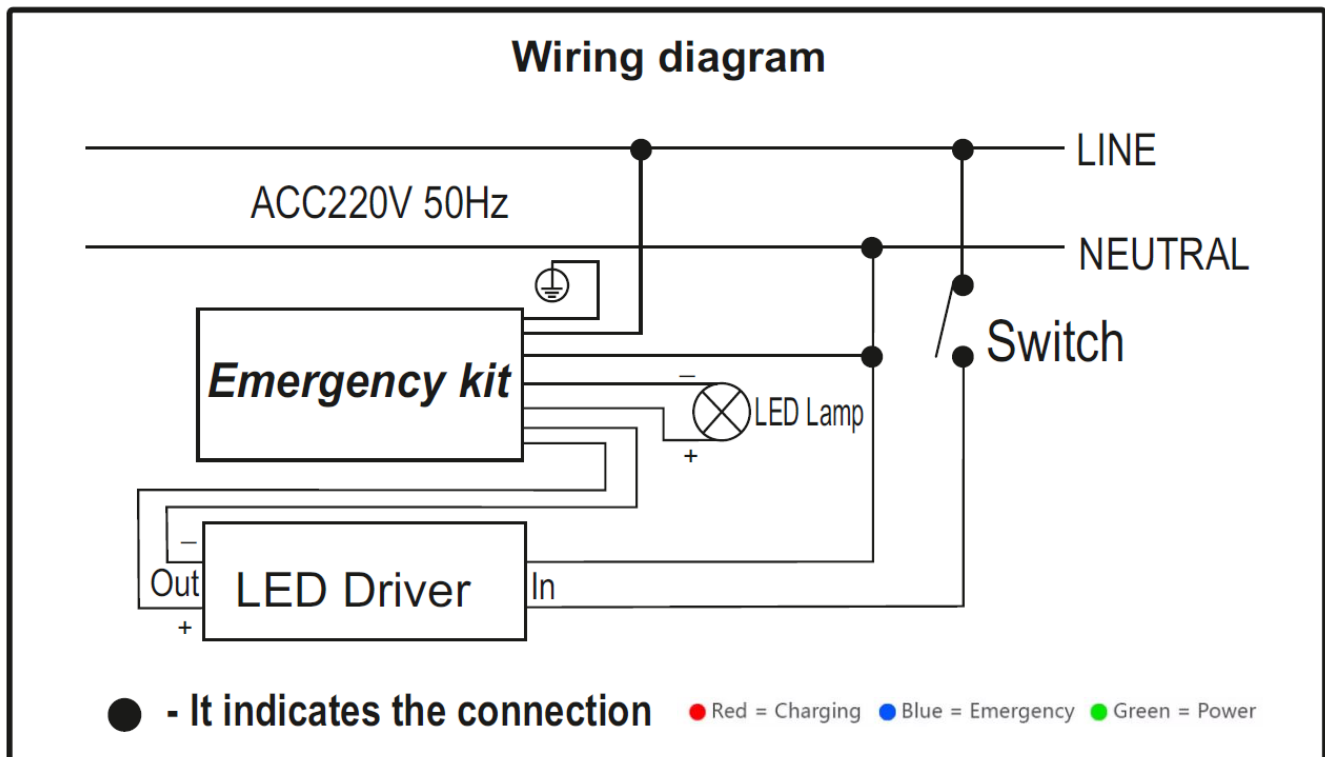
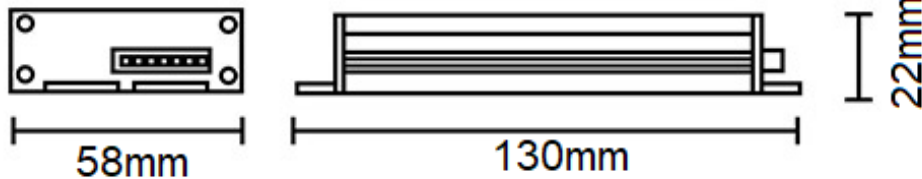
Catalogue number	Length (mm)	Width (mm)	Height (mm)	Length1 (mm)	Width1 (mm)
99XLED633	167	167	18	150	150
99XLED632	167	167	18	150	150
99XLED632CW	167	167	18	150	150
99XLED635	221	221	18	200	200
99XLED634	221	221	18	200	200
99XLED634CW	221	221	18	200	200
99XLED637	296	296	18	275	275
99XLED636	296	296	18	275	275
99XLED636CW	296	296	18	275	275

LED EMERGENCY KIT SPECIFICATIONS »





General information »


- ∴ Voltage: AC85-265V 50Hz
- ∴ Emergency Output: 3-40W
- ∴ Emergency Time: 2hrs (120mins)
- ∴ Battery: 3.7V 2400mAh
- ∴ Emergency Switching Time: <2s
- ∴ AC Fuse: 250V 1A
- ∴ DC Fuse: 250V 5A
- ∴ Luminous Flux: >100lm
- ∴ Light Source: LED
- ∴ Working temperature: -10°C +55°C
- ∴ IP Rate: IP30



ADDITIONAL INFORMATION »

stell  99XLED633
lighting solutions


 This luminaire contains built-in LED lamps.



}

L
E
D

The lamps cannot be changed in the luminaire.

874/2012 

Catalogue number	Barcode	Packing/Box (pcs)
99XLED633	3800131198679	1/24
99XLED632	3800131198662	1/24
99XLED632CW	3800131210609	1/24
99XLED635	3800131198693	1/20
99XLED634	3800131198686	1/20
99XLED634CW	3800131210616	1/20
99XLED637	3800131198716	1/20
99XLED636	3800131198709	1/20
99XLED636CW	3800131210623	1/20

