

ELMARK[®]

The Brand of Electricity

BELLA LUMINAIRE WITH LED TUBES T8 ELMARK



GENERAL INFORMATION »

- ∴ Rated voltage: 230V/ 50-60Hz
- ∴ Power: 1x10W; 1x18W; 1x24W; 2x10W; 2x18W; 2x24W
- ∴ Colour temperature: 4000K; 6500K
- ∴ Type of light source: LED tube T8
- ∴ Lamp holder: G13
- ∴ Colour: Grey
- ∴ Body: polycarbonate (PC)
- ∴ Diffuser: polycarbonate (PC)
- ∴ Reflector: steel white
- ∴ Ballast: fixed inside the body
- ∴ Clamps: polycarbonate
- ∴ Cable gland, metal clips for wall fixing.
- ∴ Colour rendering index: Ra≥80
- ∴ Switch on/off: >20 000
- ∴ Average life: 30 000h
- ∴ Ambient temperature: -15° +55°
- ∴ Protection against dust and moisture: IP65
- ∴ Available in variant with an emergency kit

FEATURES »

- ∴ Replacement of conventional fluorescent tubes with highly efficient LED tubes
- ∴ Installation options: surface ceiling mounting
- ∴ Low power consumption
- ∴ Repeated switch-on/off does not affect the lifespan of the luminaire
- ∴ Instant light with maximum luminous flux
- ∴ No ultraviolet and infrared rays
- ∴ Stable and functional light distribution


AREAS OF APPLICATION »

- ∴ Damp areas
- ∴ Dusty environment
- ∴ Kitchen premises
- ∴ Roofed outdoor areas

PRODUCT DETAILS »

Catalogue number	Catalogue number with Emergency kit	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body
9BM110LEDCW	-	1x10	800	6500	grey
9BM110LED	-	1x10	800	4000	grey
9BM118LEDCW	-	1x18	1440	6500	grey
9BM118LED	-	1x18	1440	4000	grey
9BM124LEDCW	-	1x24	1920	6500	grey
9BM124LED	-	1x24	1920	4000	grey
9BM210LEDCW	-	2x10	1600	6500	grey
9BM210LED	-	2x10	1600	4000	grey
9BM218LEDCW	9BM218LEDCWE	2x18	2880	6500	grey
9BM218LED	9BM218LEDE	2x18	2880	4000	grey
9BM224LEDCW	9BM224LEDCWE	2x24	3840	6500	grey
9BM224LED	9BM224LEDE	2x24	3840	4000	grey

DIMENSIONS »

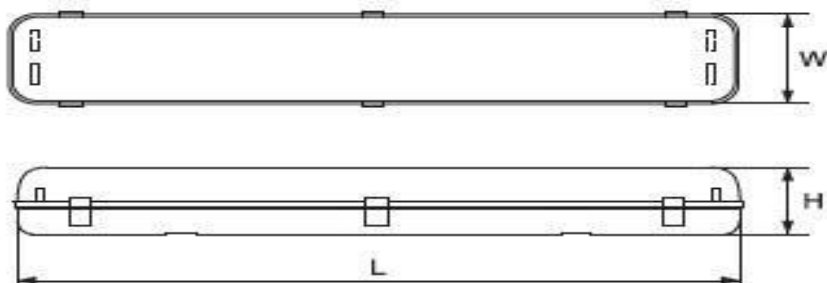

Model	Length	Width	Height
9BM110LEDCW	670	86	100
9BM110LED	670	86	100
9BM118LEDCW	1270	86	100
9BM118LED	1270	86	100
9BM124LEDCW	1570	106	110
9BM124LED	1570	106	110
9BM210LEDCW	670	131	100
9BM210LED	670	131	100
9BM218LEDCW	1270	131	100
9BM218LED	1270	131	100
9BM224LEDCW	1570	166	110
9BM224LED	1570	166	110

LED EMERGENCY KIT SPECIFICATIONS »




General information »


- ∴ Power: 5-20W
- ∴ Input voltage: 85-265V, output t230V
- ∴ Battery: li-ion 18650 11.1V 2600mAh
- ∴ Emergency time: 60-180min
- ∴ Material: stainless steel

Wiring Diagram

a. for the LED light with external drivers.

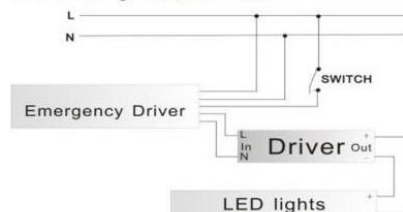


b. for the LED light with internal drivers.

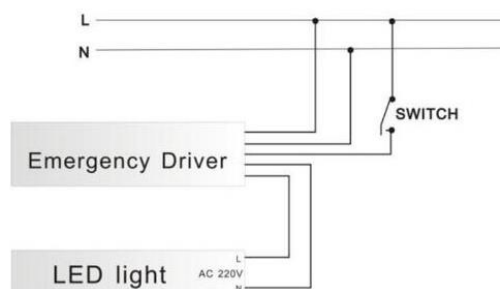

INSTALLATION ACCESSORIES »


Wire and fittings for hanging mounting 2,5m
2 pcs/ pack
Catalogue number: 92ACC03




ADDITIONAL INFORMATION »


E
ELMARK
lighting


9BM110LEDCW

 This luminaire is compatible with bulbs of the energy classes:



The luminaire is sold with a bulb of the energy class:



874/2012 

Catalogue number	Barcode	Packing/Box (pcs)
9BM110LEDCW	3800131189875	1/12
9BM110LED	3800131189882	1/12
9BM118LEDCW	3800131189912	1/9
9BM118LED	3800131189929	1/9
9BM124LEDCW	3800131189950	1/6
9BM124LED	3800131189967	1/6
9BM210LEDCW	3800131189899	1/9
9BM210LED	3800131189905	1/9
9BM218LEDCW	3800131189936	1/6
9BM218LED	3800131189943	1/6
9BM224LEDCW	3800131189974	1/4
9BM224LED	3800131189981	1/4
9BM218LEDCWE	3800131205919	1/1
9BM218LEDE	3800131202956	1/1
9BM224LEDCWE	3800131206084	1/1

